


OVER ARM SERIES

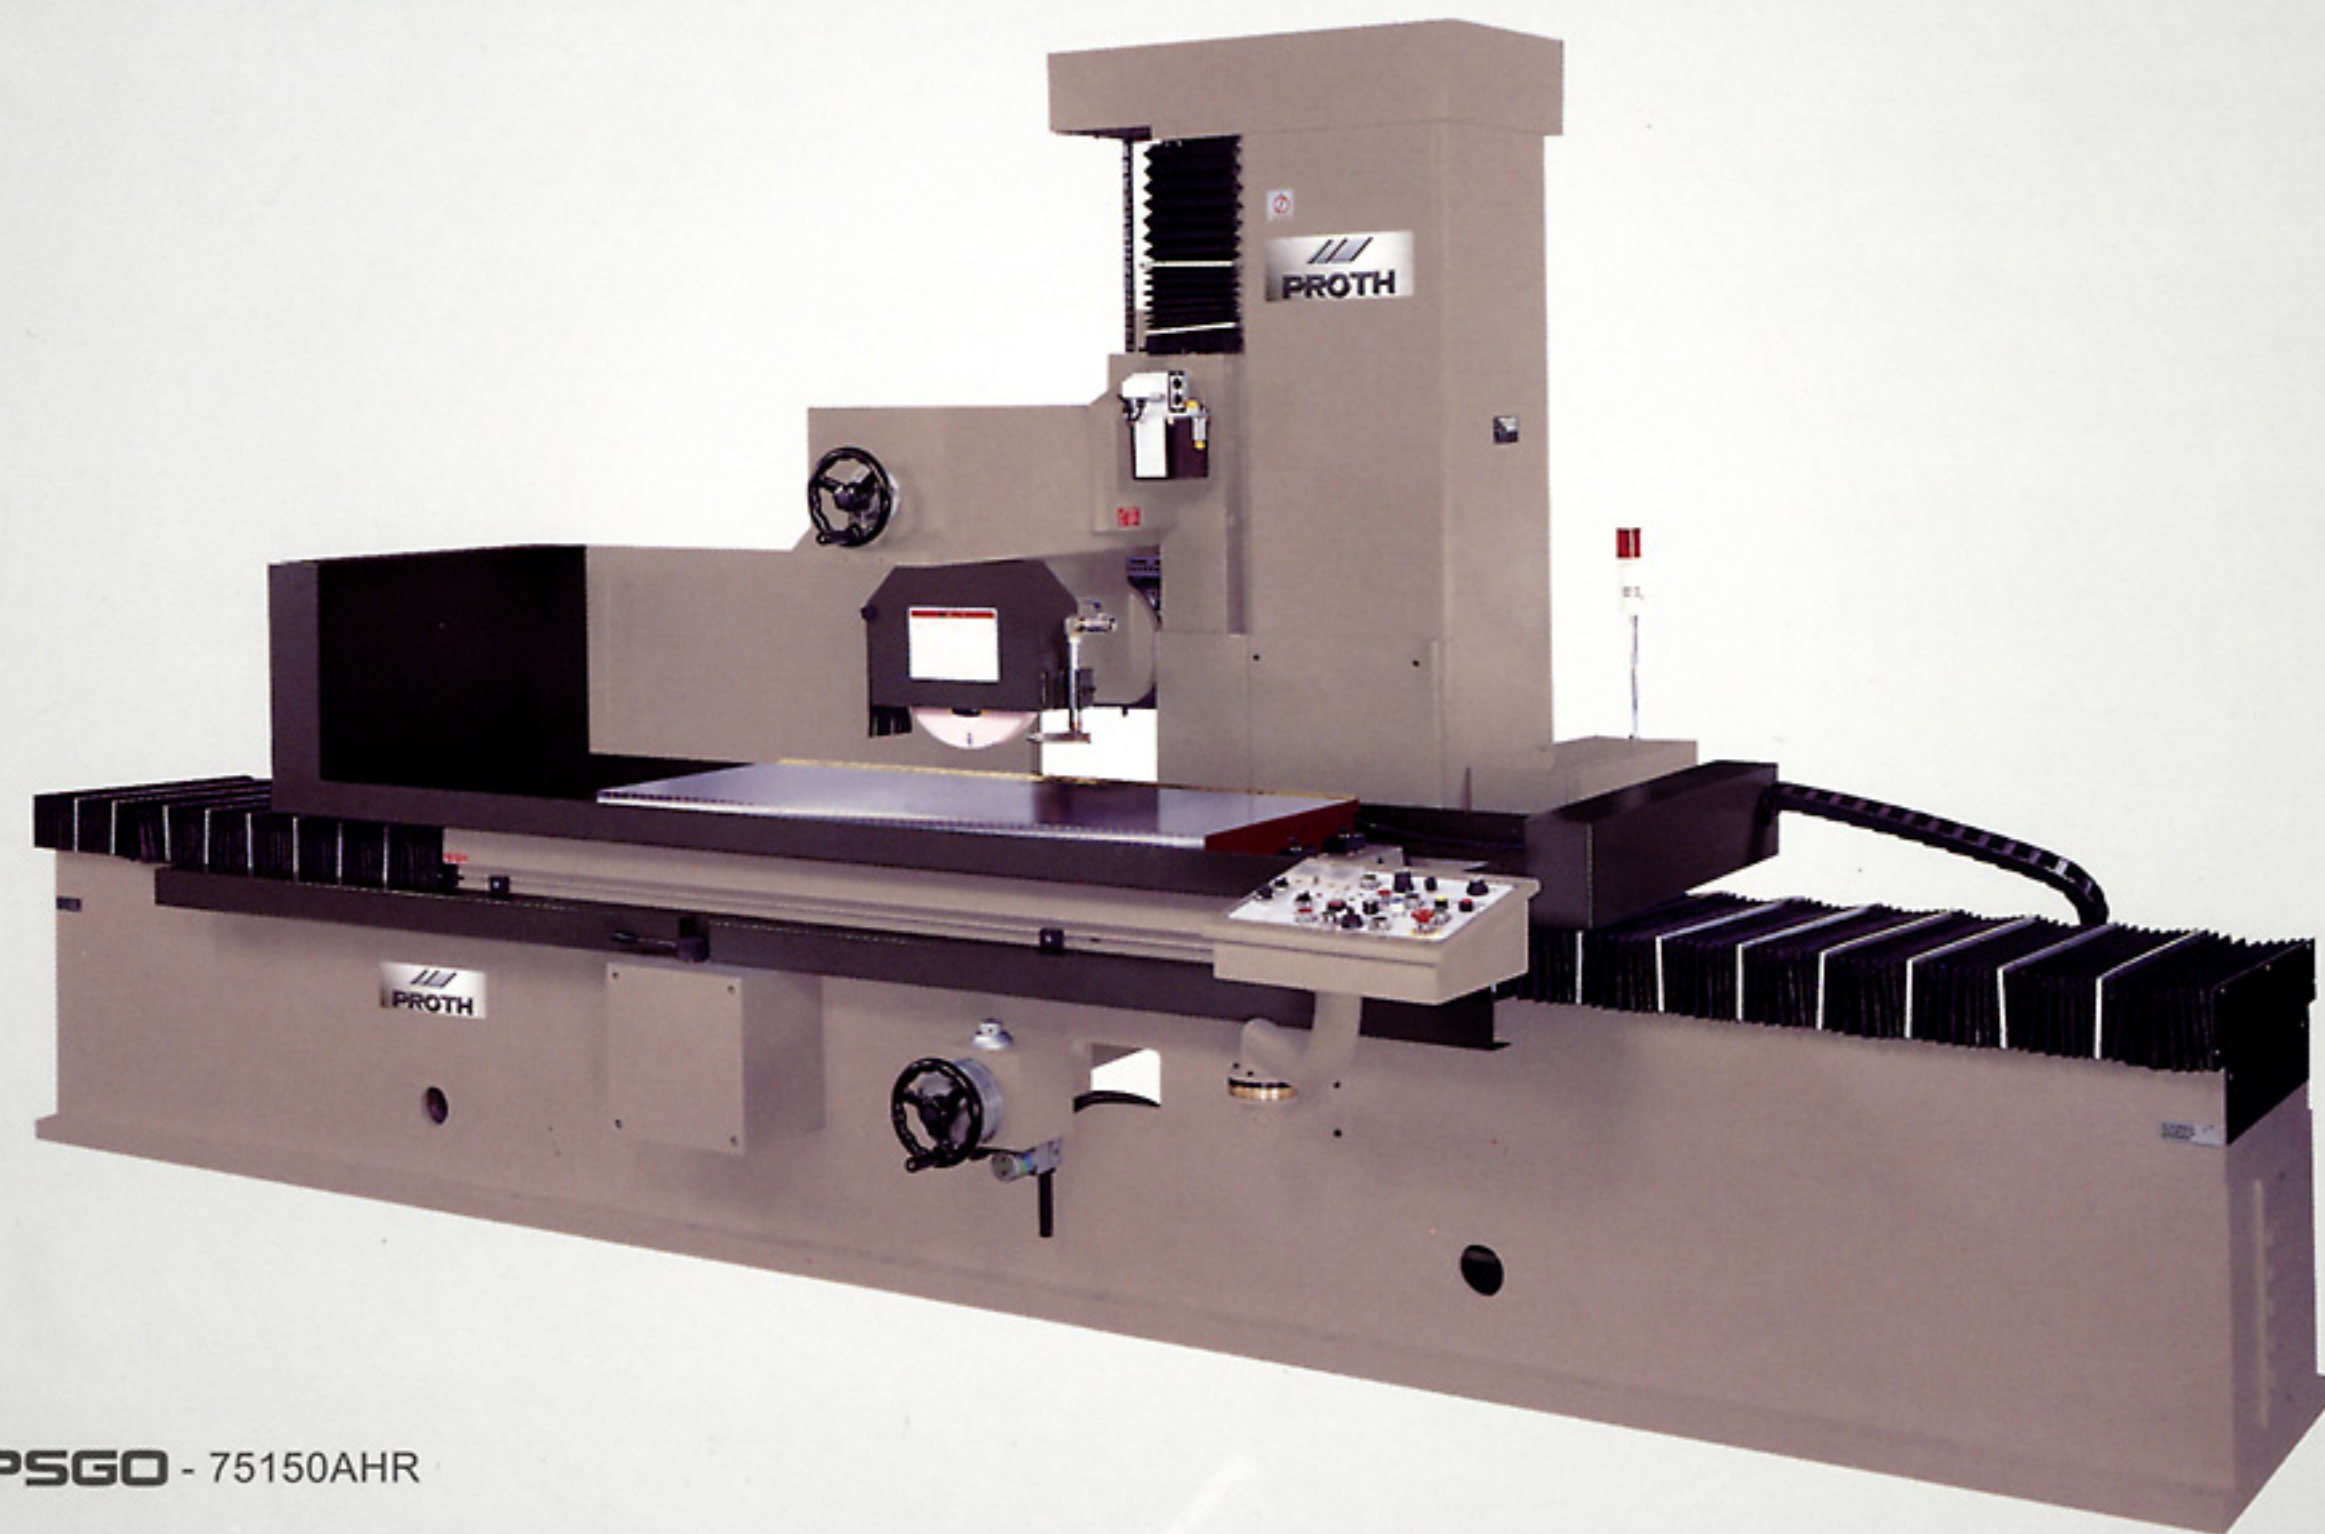

PSGO - 75150AHR

SPECIFICATION / MODELS		PSGO			
		60150AHR	75150AHR	75220AHR	75300AHR
General Capacity	Max.travel(cross×longitudinal)	660x1650mm	810x1650mm	810x2350mm	810x3150mm
	Spindle center height from table	700 (950)mm			
	Grinding surface of table	600x1500mm	750x1500mm	750x2200mm	750x3000mm
Longitudinal Movement	Hydraulic table speed(60Hz)	1-25m/min			
Cross Movement	Intermittent cross feed-approx. (Electro-mechanical)	0.1-15mm/feed			
	Continuous cross feed-approx. (Electro-mechanical)	2000mm/min(50Hz) , 2400mm/min(60Hz)			
	Hand feed per revolution	5mm			
	Hand feed per division	0.02mm			
Vertical Downfeed	Rapid traverse approx.(option)50Hz	240mm/min			
	Hand feed per revolution	0.25mm			
	Hand feed per division	0.0025mm			
Grinding Wheel	Dimension(O.D×W×I.D)	355x50x127mm			
	Spindle speed 50/60Hz	1500/1800 r.p.m.			
Motor	Spindle motor	7.5(11)kW/10(15)HP			
	Hydraulic motor	5.6kW/7.5HP			
Weight	Net weight	9350kg	11000kg	12500kg	14400kg
	Gross weight	10800kg	12300kg	14000kg	16000kg
Packing Size	Dimension(L×W×H) (m)	5.4x2.27x2.8		6.92x2.27x2.8	7.47x2.27x2.8

- Since we subscribe to a process of continuous improvement for our products,specifications are subject to change without notice.
- Machine appearance will change depending upon different optional equipment selected.
- Equipment marked with () is available at additional extra charge. Other special applications may be provided upon specific requests from customers. Please contact us for more details.
- Machines are shown with optional equipments.